

HENRII



Yves No. 18

INSTALLATION GUIDE



EN: CAUTION

Electrical shock risk. Turn off electrical power at main circuit panel before beginning installation or servicing. We recommend working with a qualified electrician to ensure proper installation.

FR: ATTENTION

Risque de choc électrique. Coupez l'alimentation électrique au niveau du tableau principal avant de commencer l'installation ou l'entretien. Il est recommandé de faire appel à un électricien qualifié pour garantir une installation correcte.

ES: ATENCIÓN

Riesgo de descarga eléctrica. Desconecte la energía en el panel principal antes de comenzar la instalación o el mantenimiento. Se recomienda contar con un electricista calificado para garantizar una instalación adecuada.

IT: ATTENZIONE

Rischio di scossa elettrica. Spegner e l'alimentazione elettrica al quadro principale prima di iniziare l'installazione o la manutenzione. Si consiglia di rivolgersi a un elettricista qualificato per garantire un'installazione corretta.

KR: 주의

전기 충격 위험이 있습니다. 설치 또는 점검을 시작하기 전에
메인 전기 패널에서 전원을 차단하십시오.
적절한 설치를 보장하기 위해 자격을 갖춘 전기 기술자의
도움을 받으시기 바랍니다.

BEFORE INSTALLING

Please retain these instructions for future reference. Read all instructions carefully before installation, noting the accompanying illustrations. Instructions must be followed precisely.

Turn off electrical power at main circuit panel before beginning any installation or servicing. Ensure that the circuit to which the fixture will be connected has been installed and fused in accordance with local electrical standards.

Do not fit bulbs that exceed the maximum allowable wattage. If a bulb requires replacement, always switch off the main power and allow the fixture to cool.

Determine the fixing method appropriate to the surface material. The client or installer is responsible for ensuring that the mounting surface can securely support the weight of the fixture.

HENRII takes no responsibility for improperly installed lights and recommends that all fixtures be installed by a qualified electrician.



A minimum of two installers is required for this light fixture.

CARE INSTRUCTIONS

Before cleaning, ensure the fixture is switched off. Please handle the fixture with care.

For maintaining clarity and color, wiping with a damp cloth is generally sufficient. Do not submerge in water. Do not use scouring pads or abrasive cleaning solutions.
Frosted/Etched Glass: Clean with a dry cloth to avoid smearing.

PRODUCT SPECIFICATIONS

Voltage: 120v / 240v


Socket: Type E26/E27, Max 75w

Bulb: 4x E26/E27 5.0W, 90+CRI, 550 Lumens, 2700K, Dimmable


Weight: 35 lb (15.9 kg)

DIMENSIONS

Mounting Plate

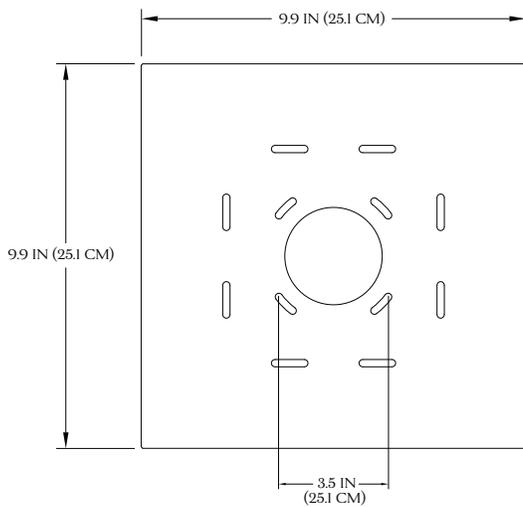


Side View

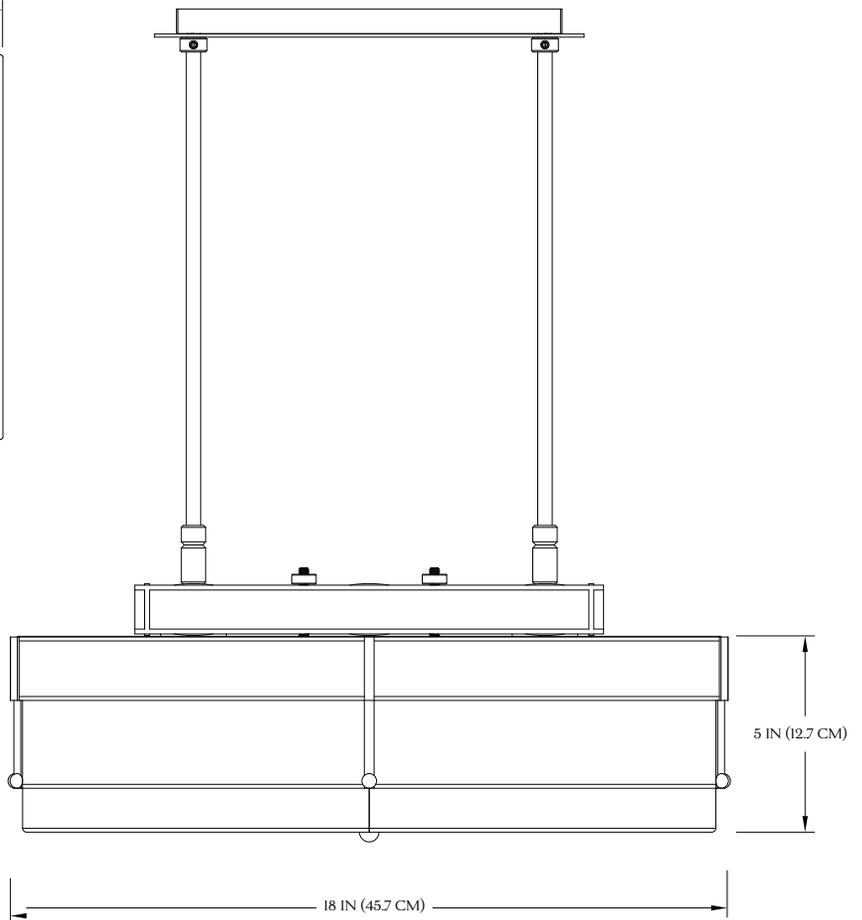


INCLUDED COMPONENTS


HENRII appreciates your selection. Please confirm that all components depicted in the enclosed guide are included. If any items are missing, immediate notification is requested. The fixture is constructed for lifetime use when maintained properly. For further inquiries, direct correspondence to service@henrii.com.

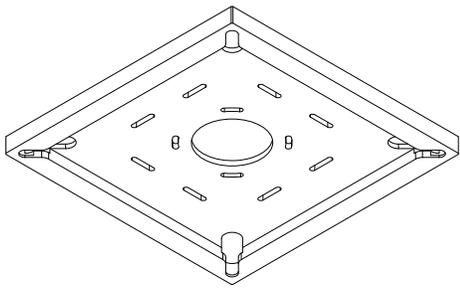


Canopy Body (1x)




Mounting Screws (2x)

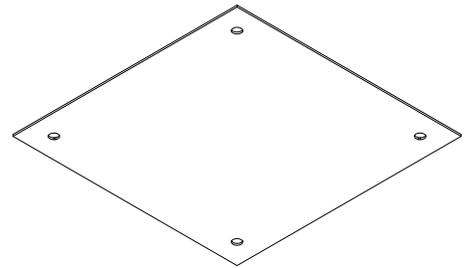


Canopy Cover (1x)




Slip-Through Rings
with Locking Set Screws (4x)

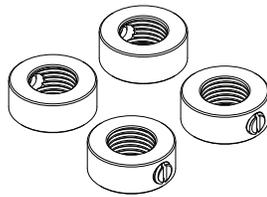


Threaded Brass Nuts
with Locking Set Screws (4x)

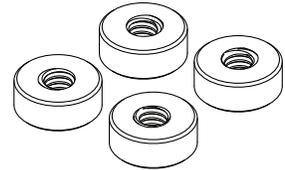


Threaded Fasteners (4x)

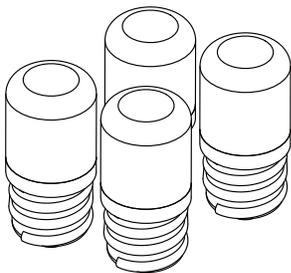

E26/E27 Lightbulbs (4x)




Wood Screws
(Not Included)




Drywall Anchors
(Not Included)

COMPONENT OVERVIEW

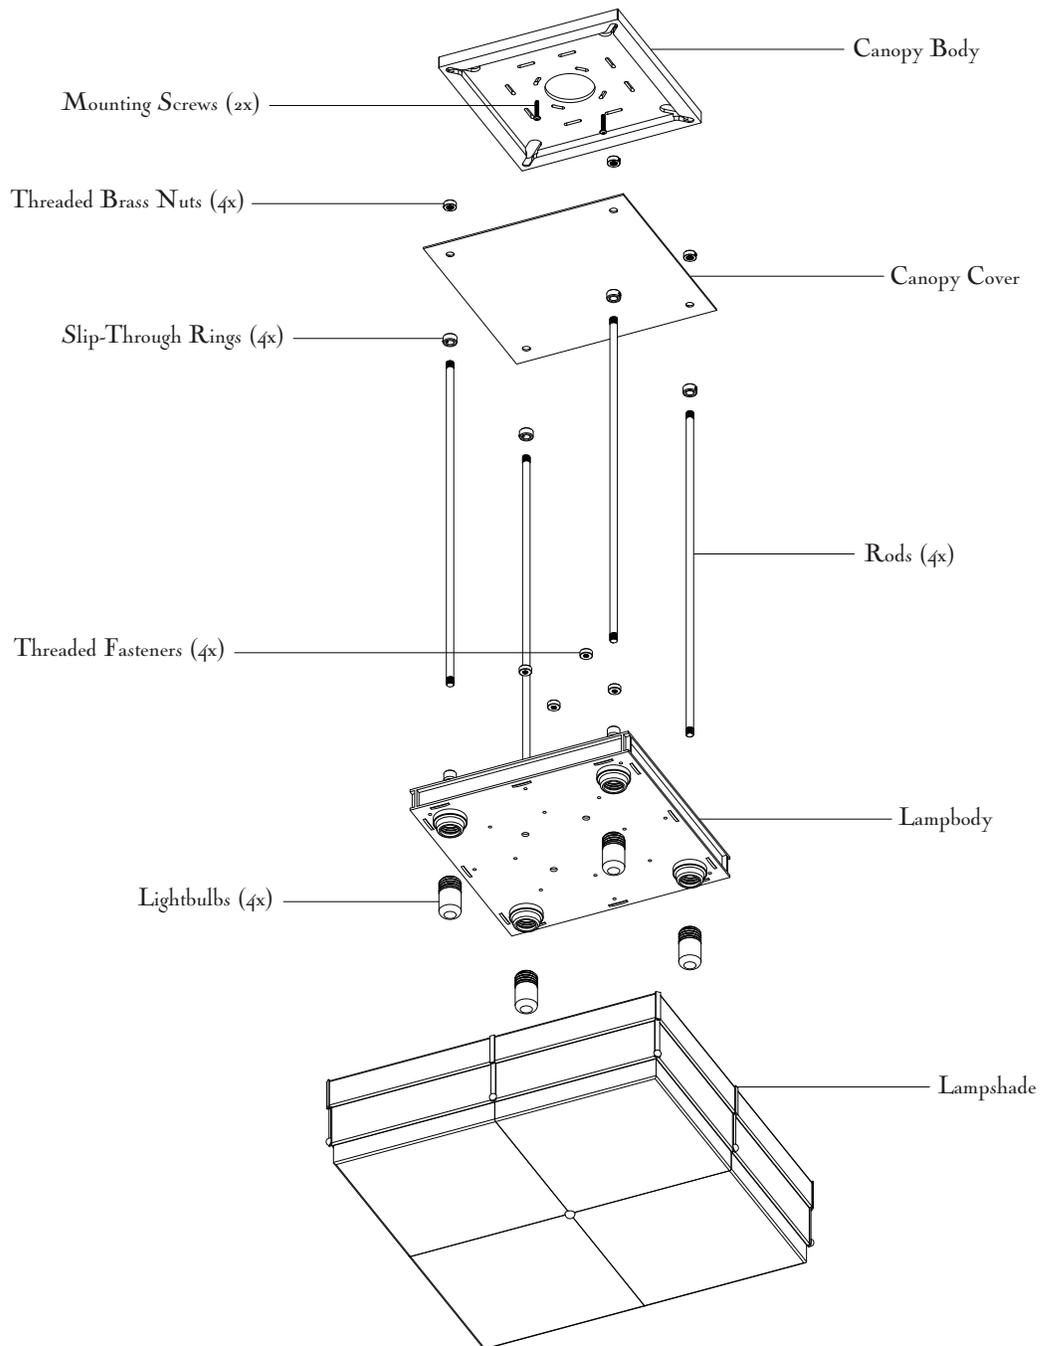


Screws and wall anchors are not supplied for this fixture. Determine the correct fixing method for your surface before installation. The installer is fully responsible for ensuring a safe and proper installation. Only use hardware that is suitable for the substrate and able to support the full weight of the fixture.

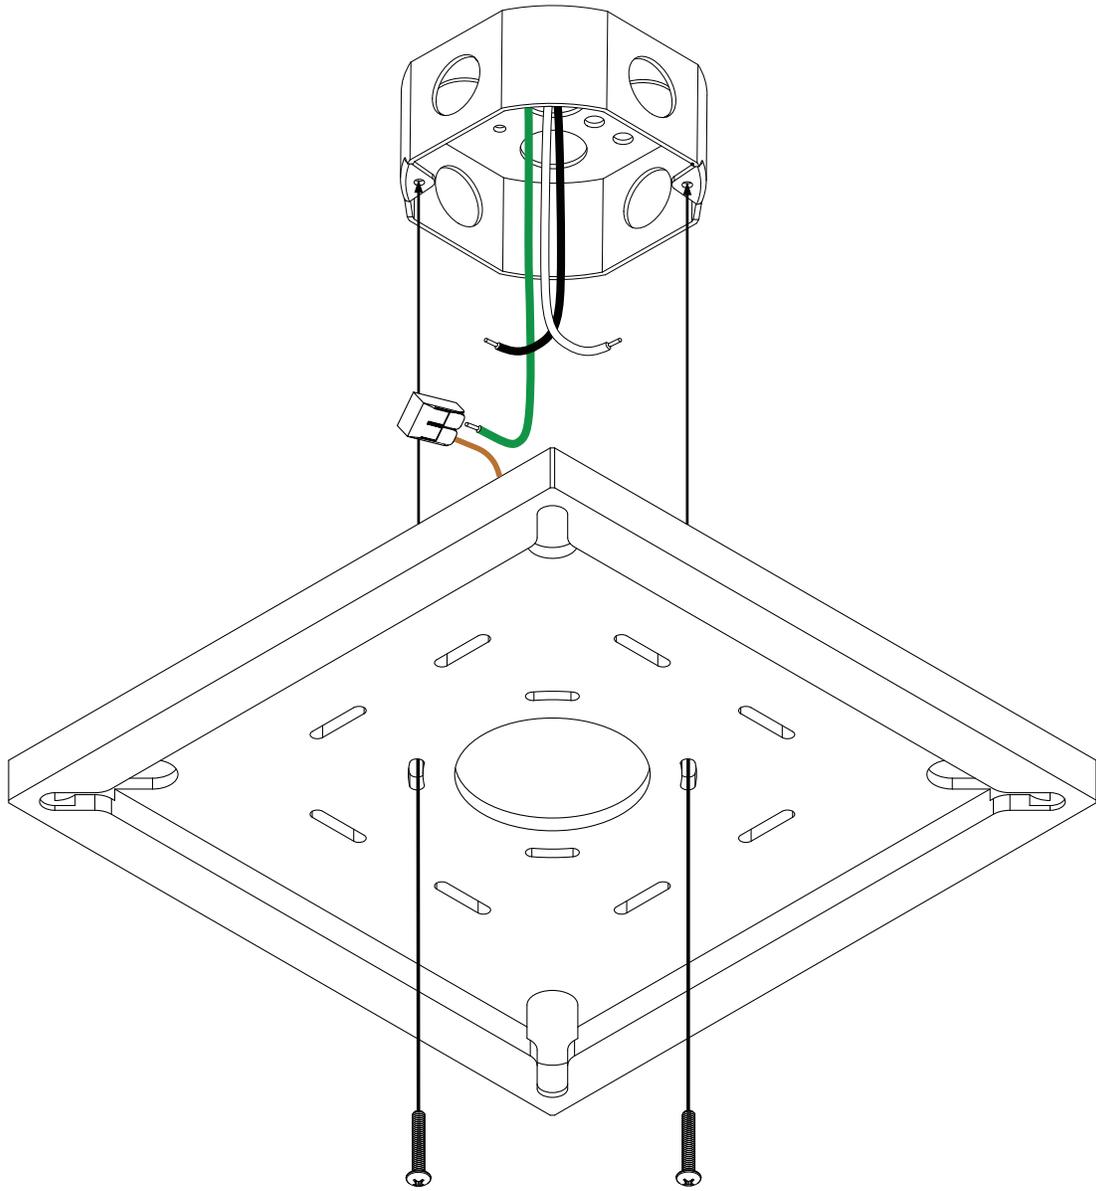

I.

Connect the Ground Wire (Copper) to the corresponding Ground Wire (Green) from the junction in the ceiling using wire connectors.

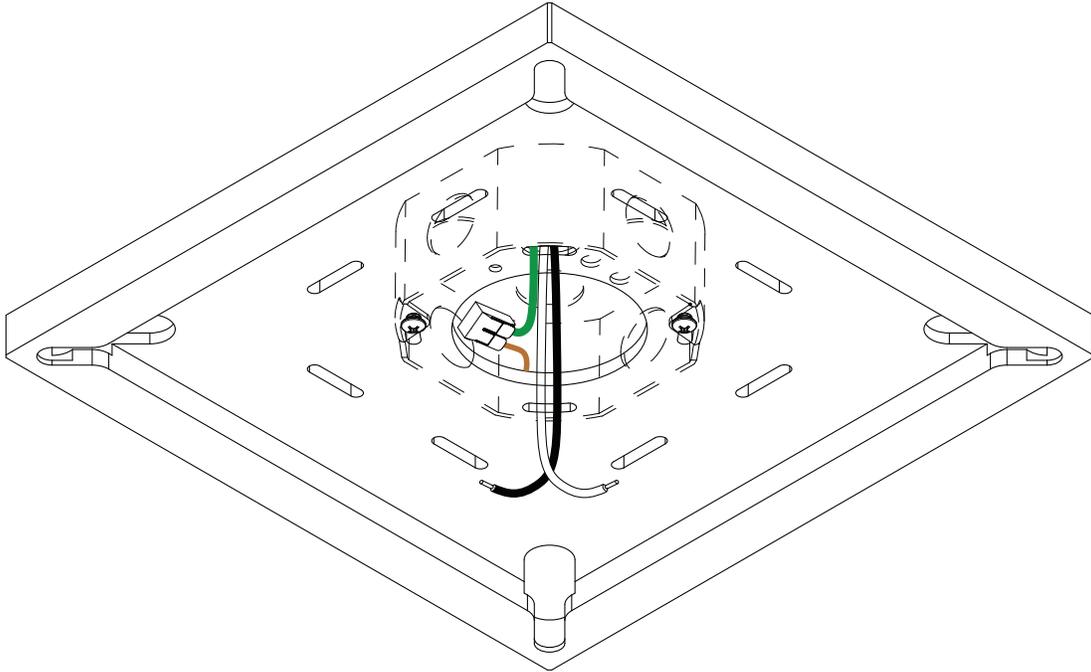

II. USA


Install the Canopy Body to the junction box and secure with provided Mounting Screws.

INTERNATIONAL

Installation standards vary globally. The client or installer is responsible for ensuring the Mounting Plate is securely fastened to a suitable structural substrate.




Improper installation may result in damage or safety risks. We strongly recommend working with a qualified professional familiar with local codes and site-specific conditions.

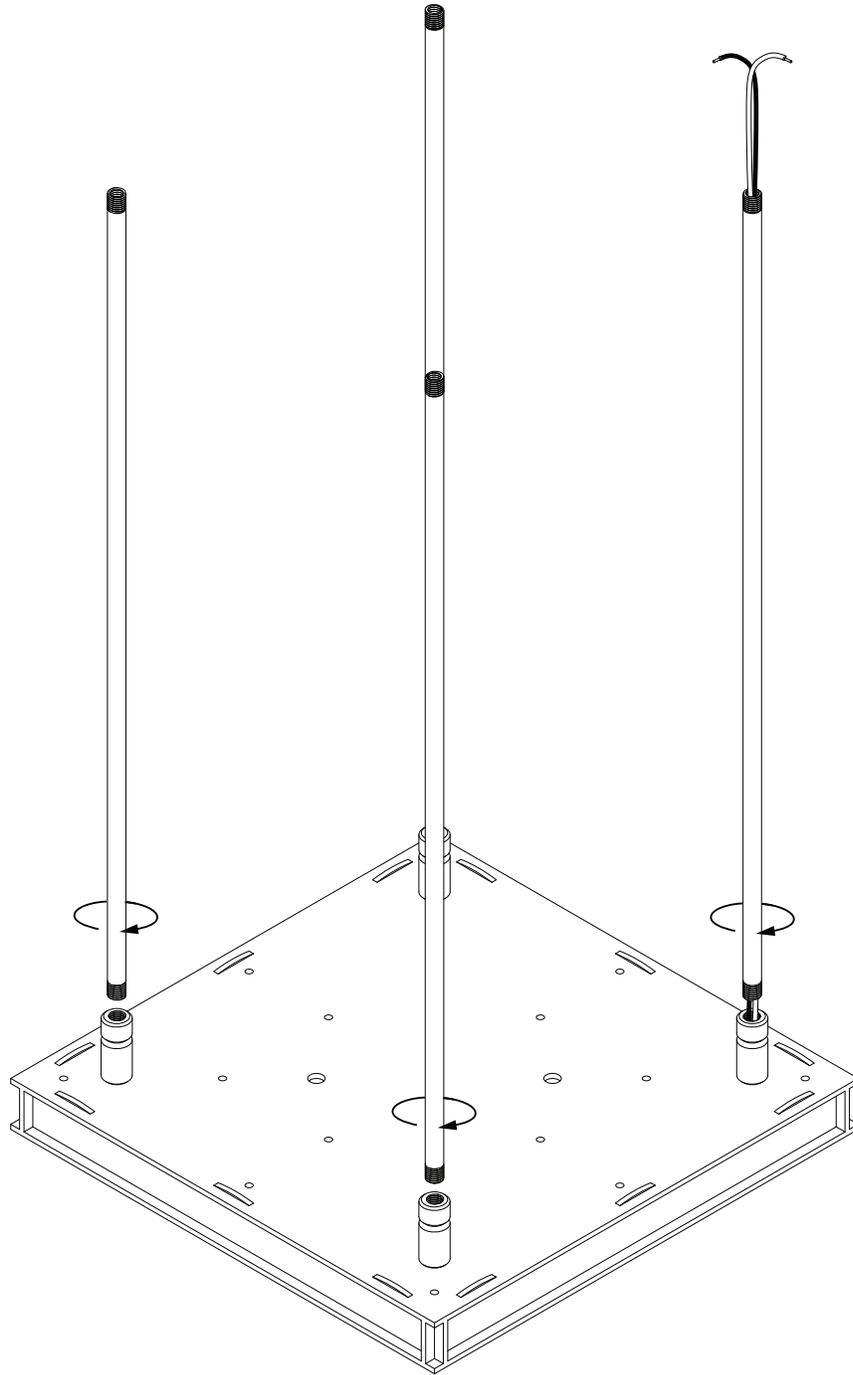



III.

Feed the electrical wires through one of the supplied rods. Then, screw each of the four rods into the coupling nuts on the Lampbody until fully tightened.

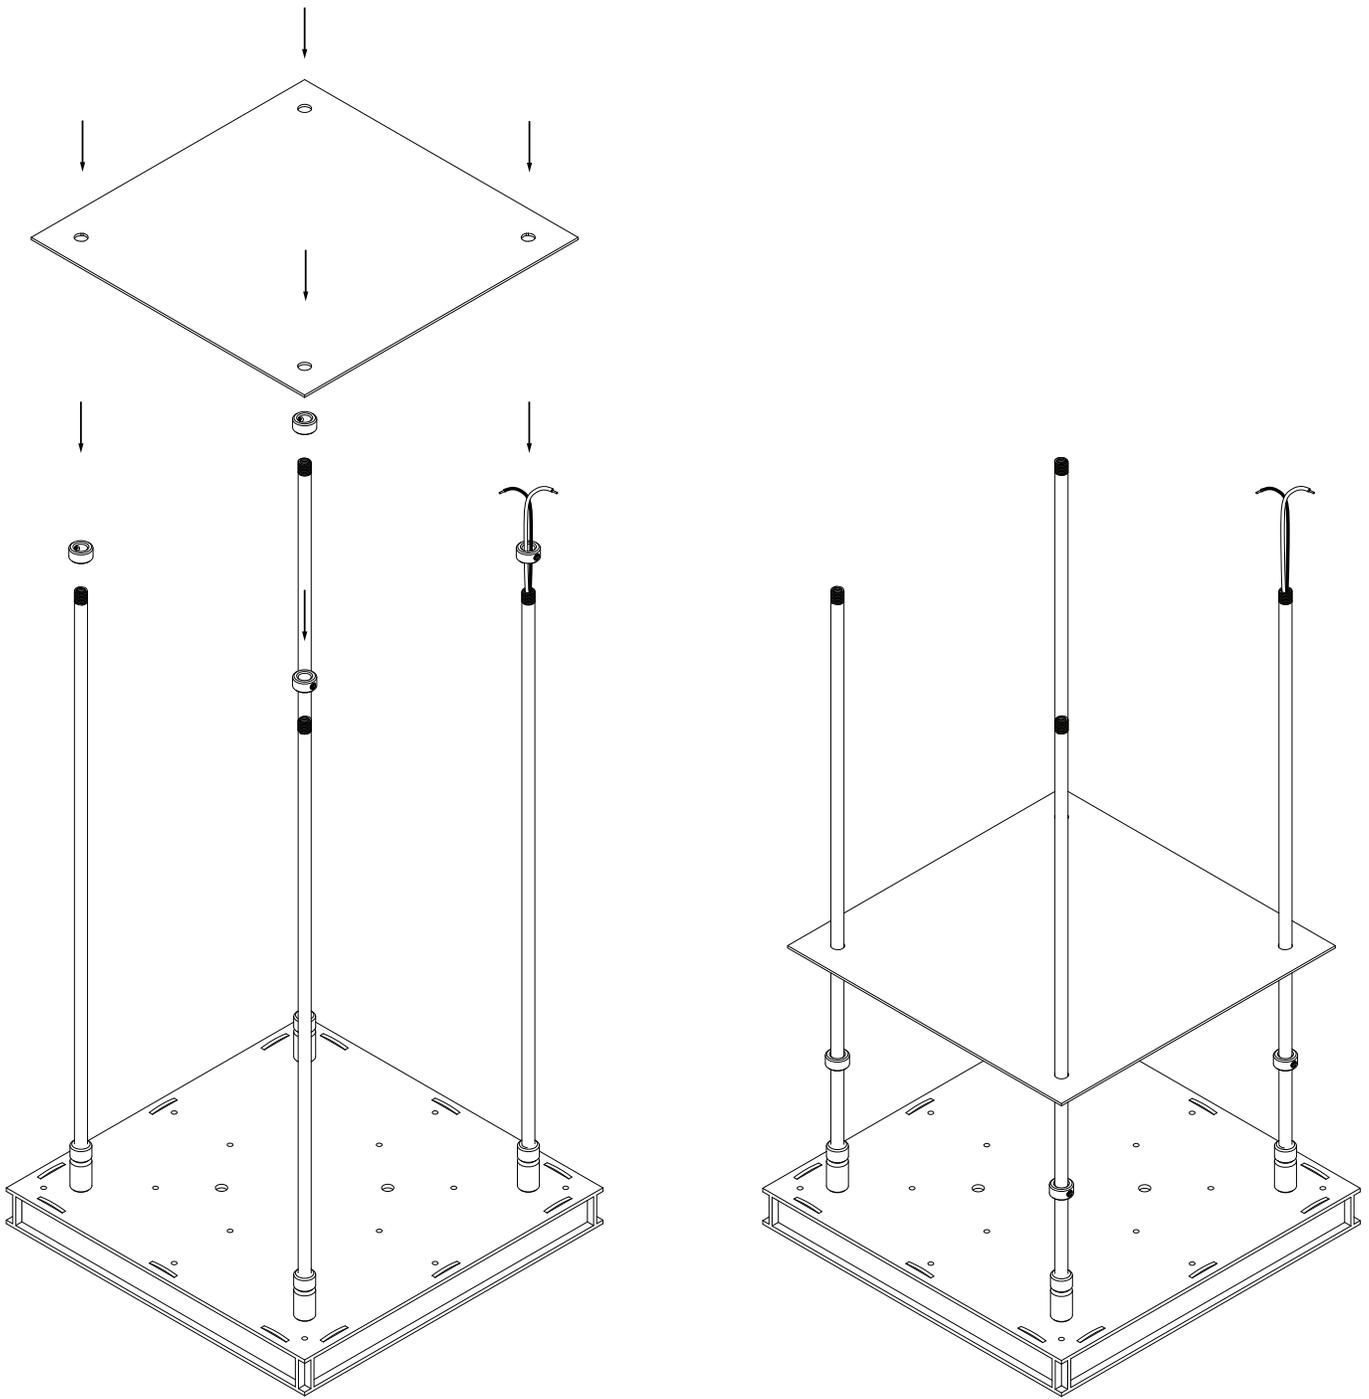



IV.

Slide the Slip-Through Rings (4x) onto each of the four rods. Then, pass the Canopy Cover over all four rods, sliding it down into position.

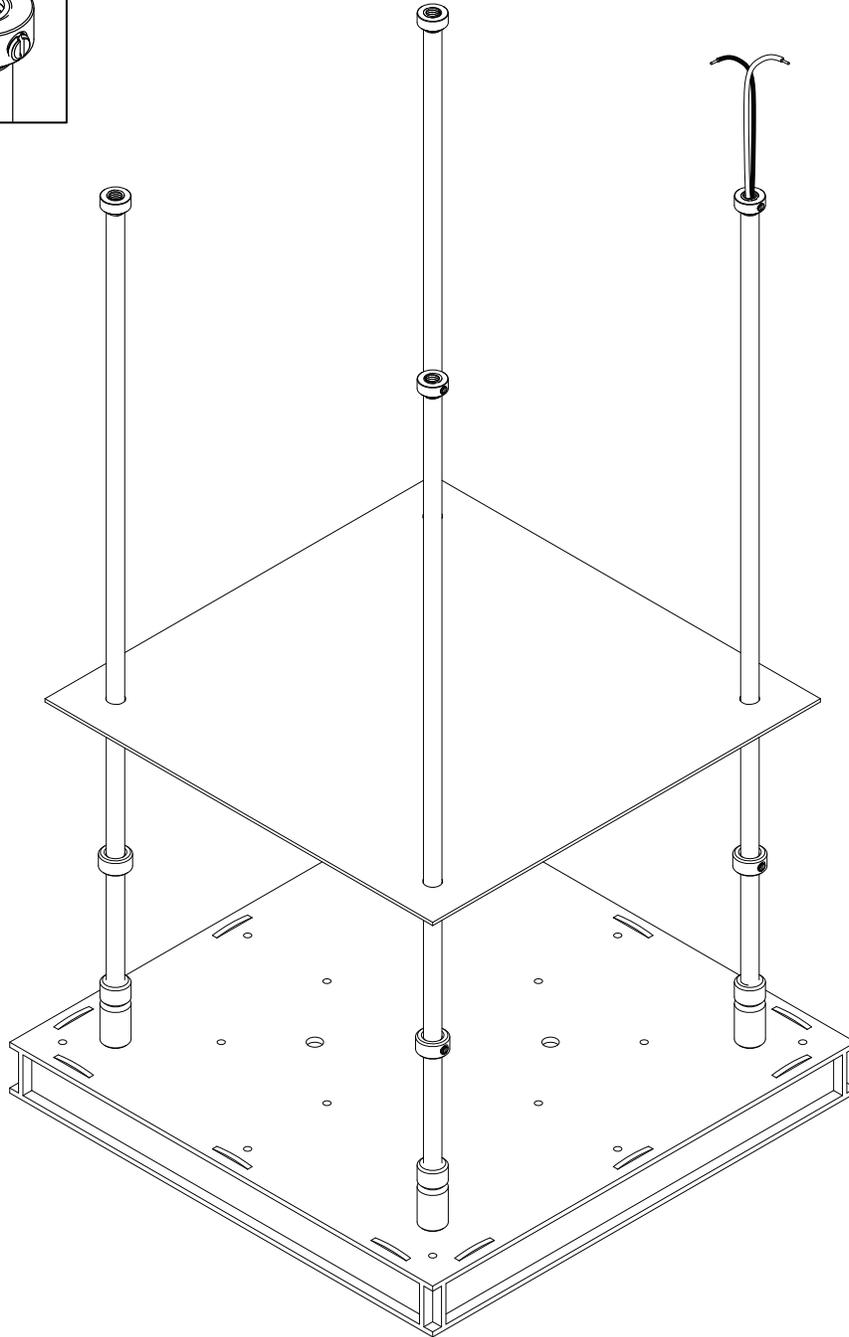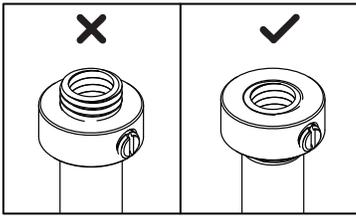

V.

Thread a **Brass Nut** onto each of the four rods, ensuring the nut sits flush with the end of the rod. Once positioned, secure each **Brass Nut** by tightening the built-in set screws with a small flathead screwdriver.

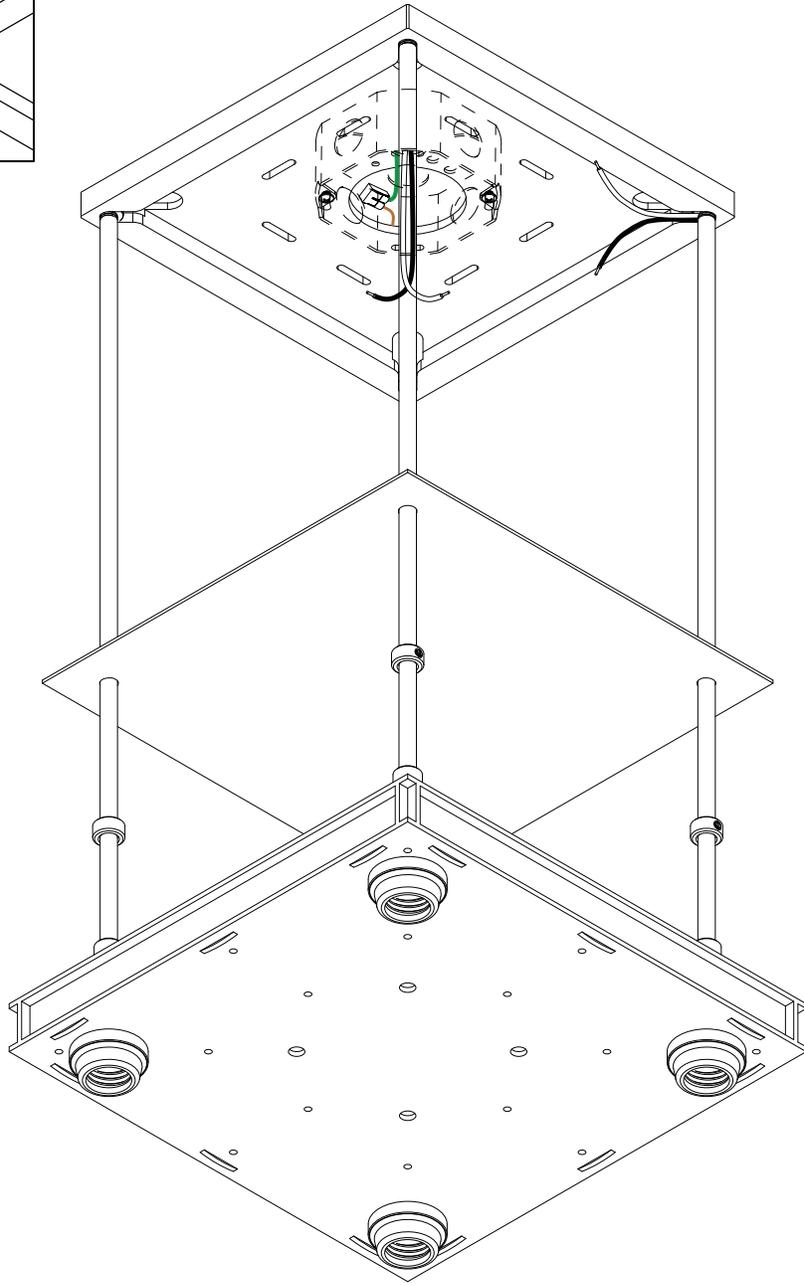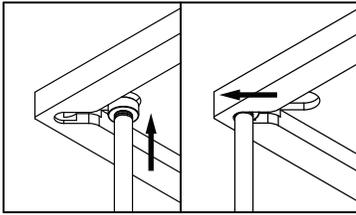


VI.

Carefully lift the lamp body, ensuring all attached parts are supported. To connect the rods to the canopy, align the Brass Nuts with their corresponding canopy corners. Lift the assembly and slide each rod into place to secure the connection.




A minimum of two installers is required for this step.

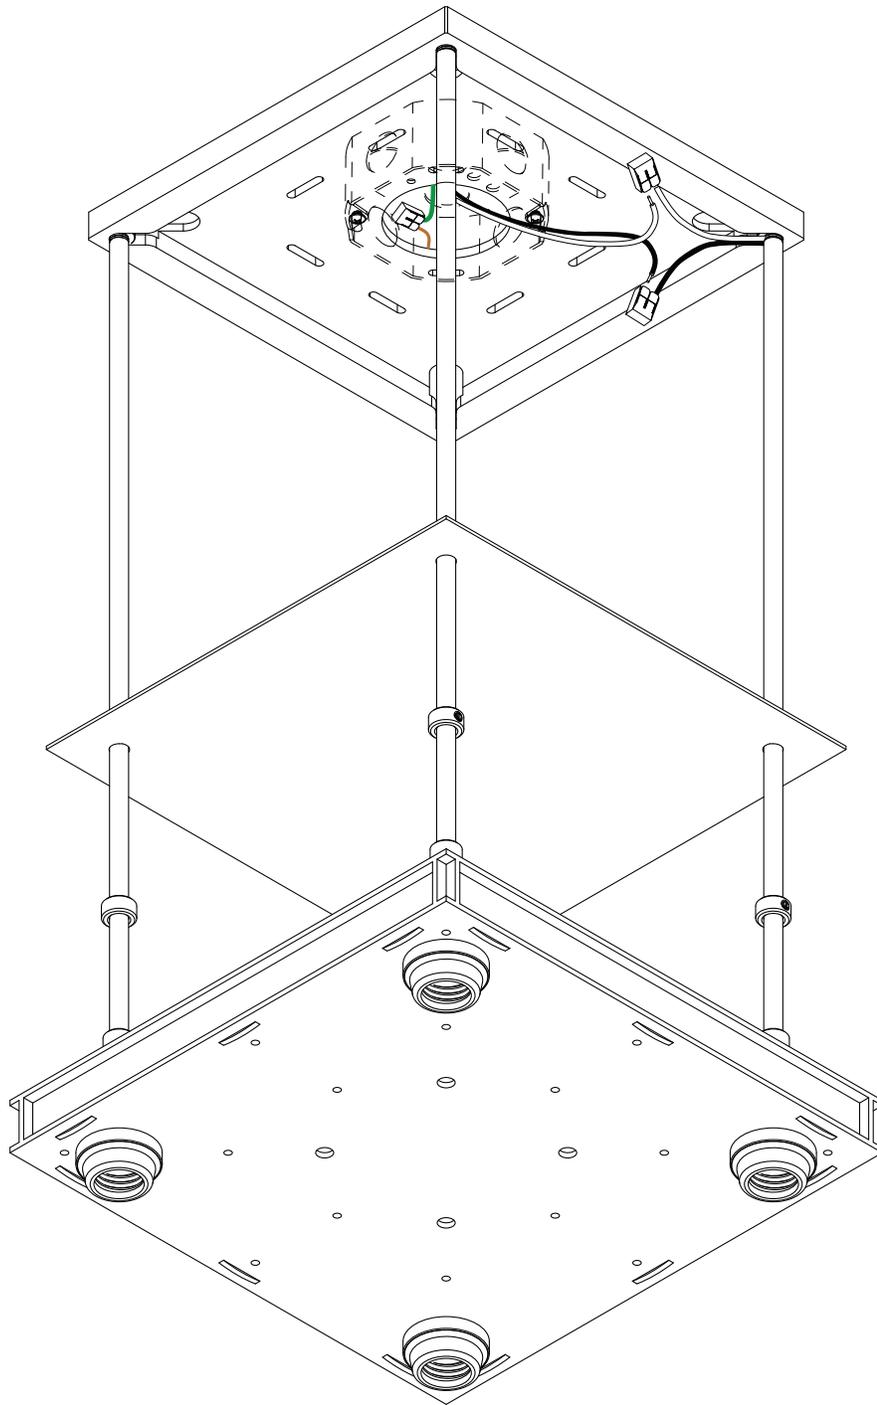


VII.

Connect the fixture's wires to the corresponding wires from the junction in the ceiling using wire connectors. **White** is neutral and **Black** is live.

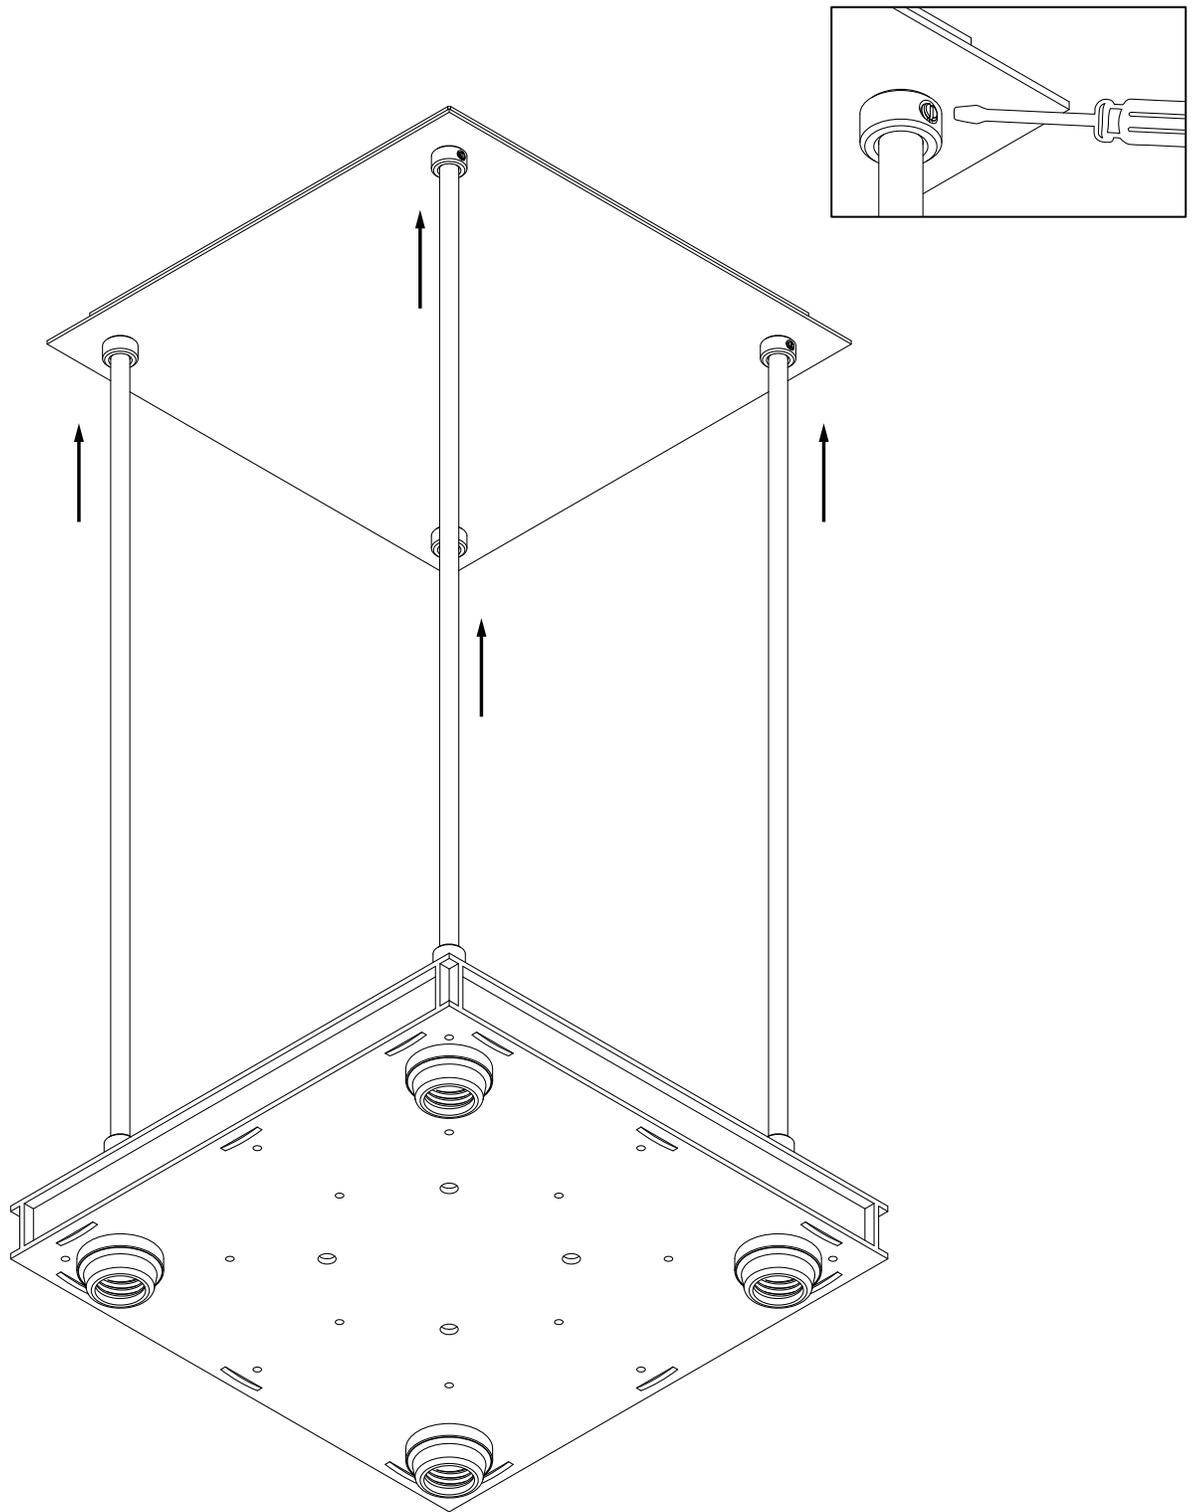


VIII.

Raise the Canopy Cover and hold it in position. Slide the Slip-Through Rings upward to meet the Canopy Cover, and secure them by tightening the locking set screws on each corresponding nut.

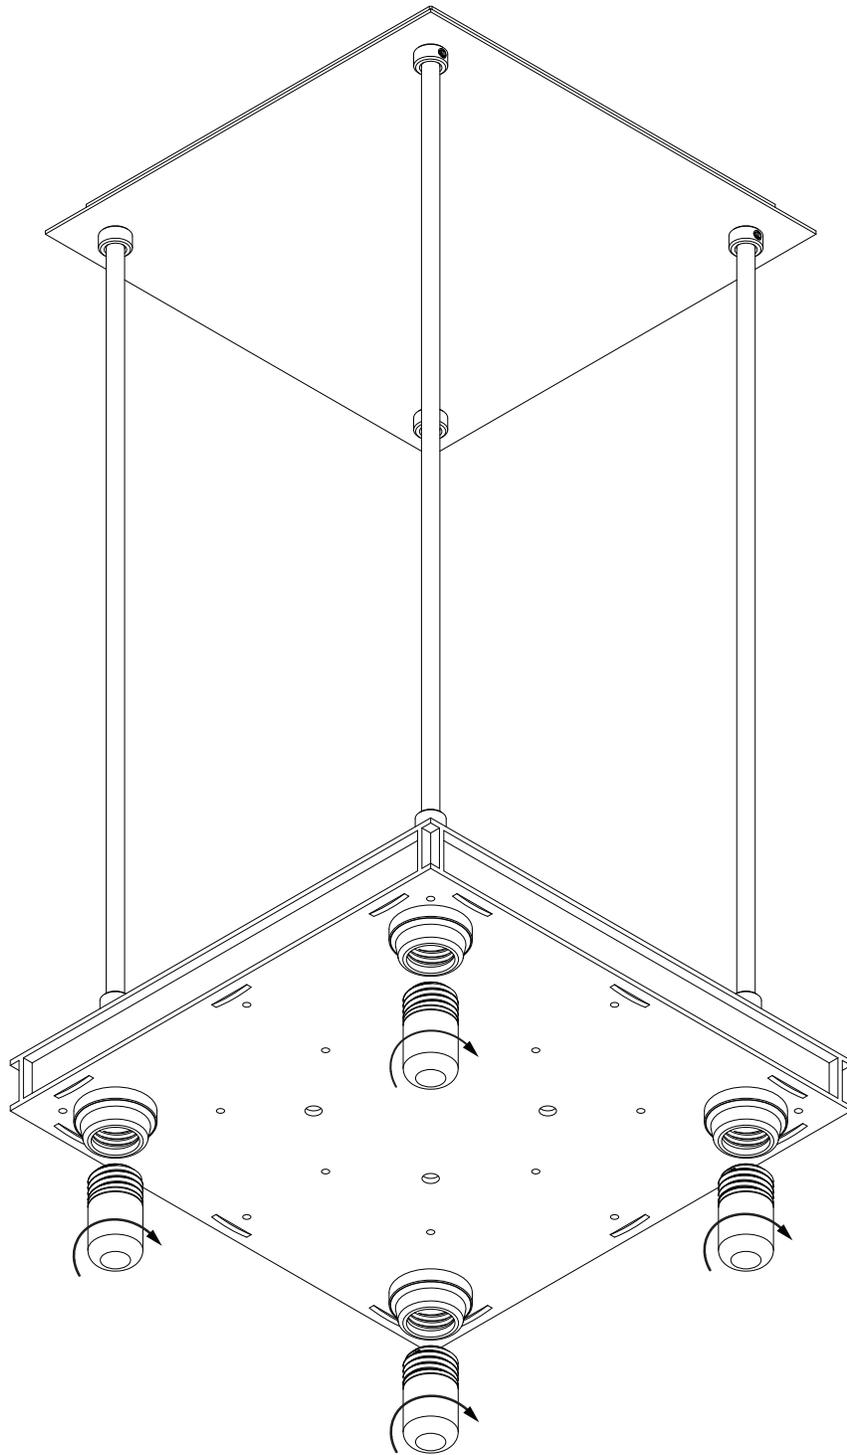


VIII.

Insert light bulbs (4x) and twist into sockets.

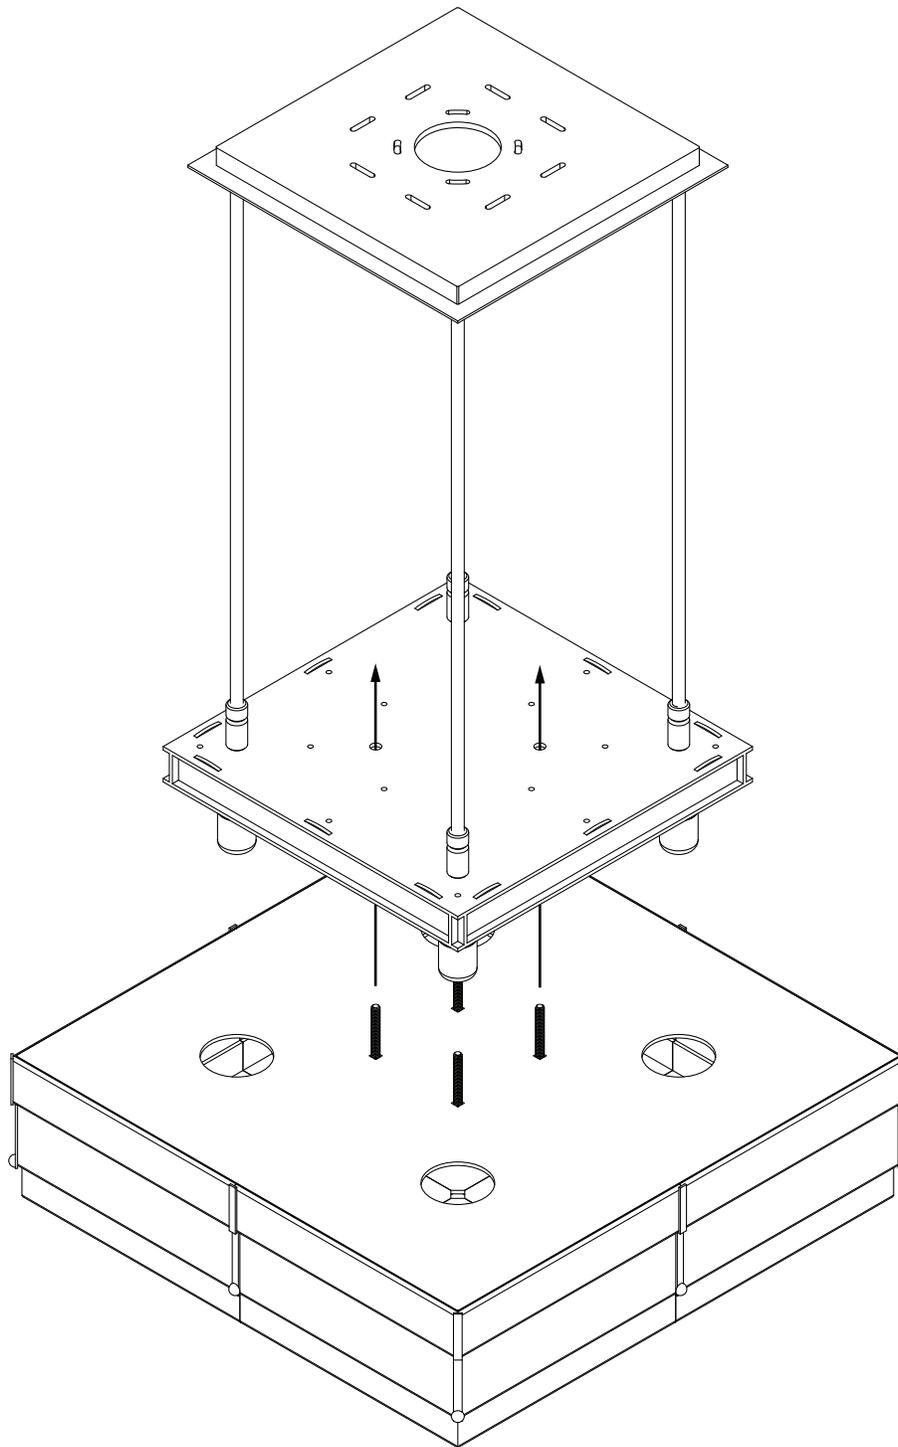

X.

Raise the Lampshade and hold it secure, making sure all four carriage bolts are threaded through the Lampbody.

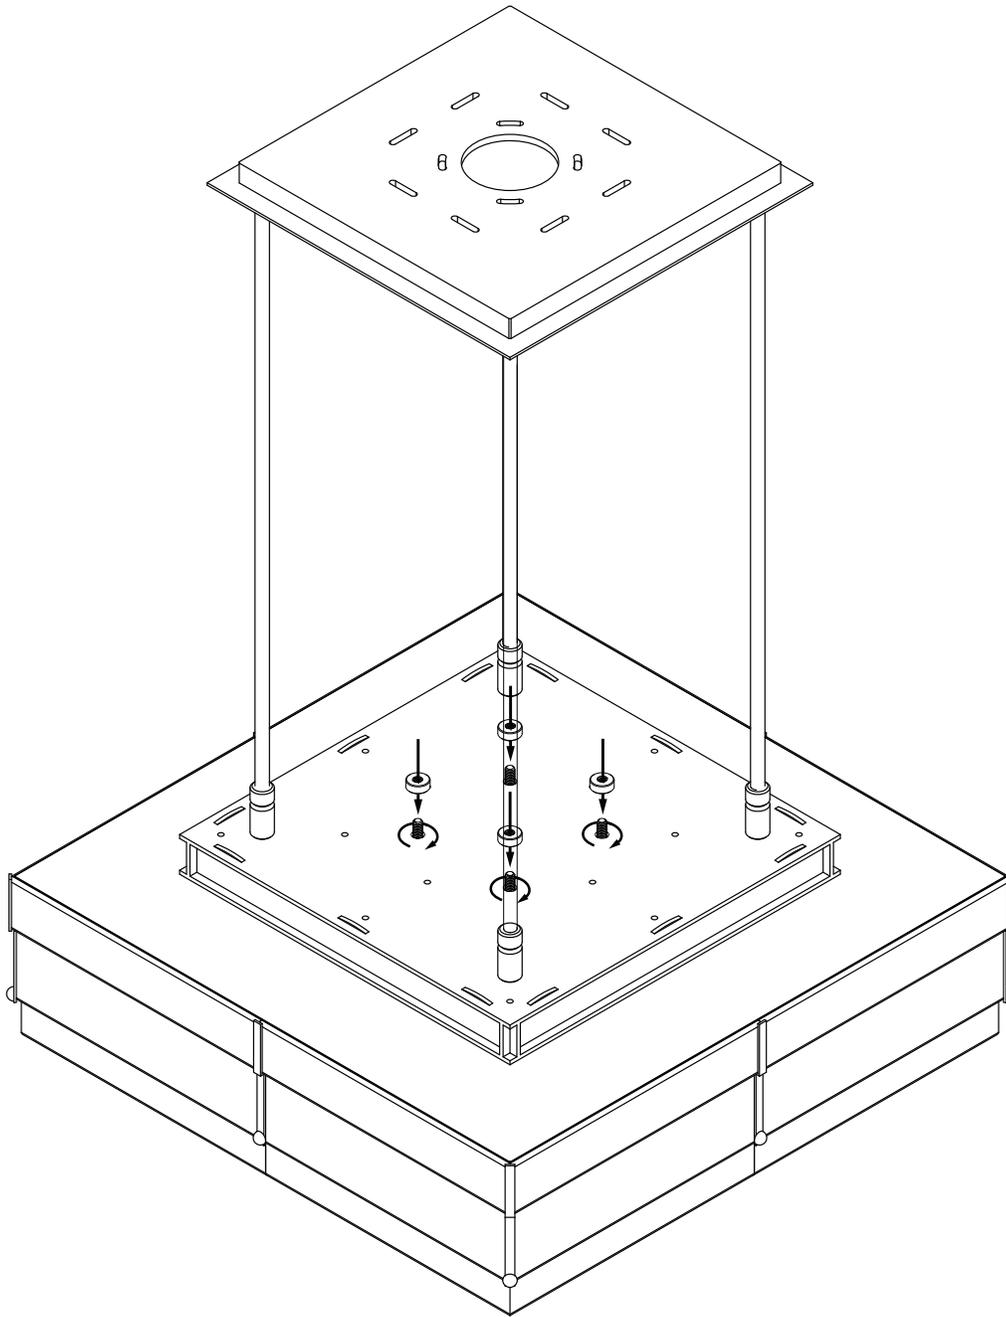


XI.

Secure the Lampshade by twisting the Threaded Fasteners (4x) through each of the four carriage bolts.



A minimum of two installers is required for this step.

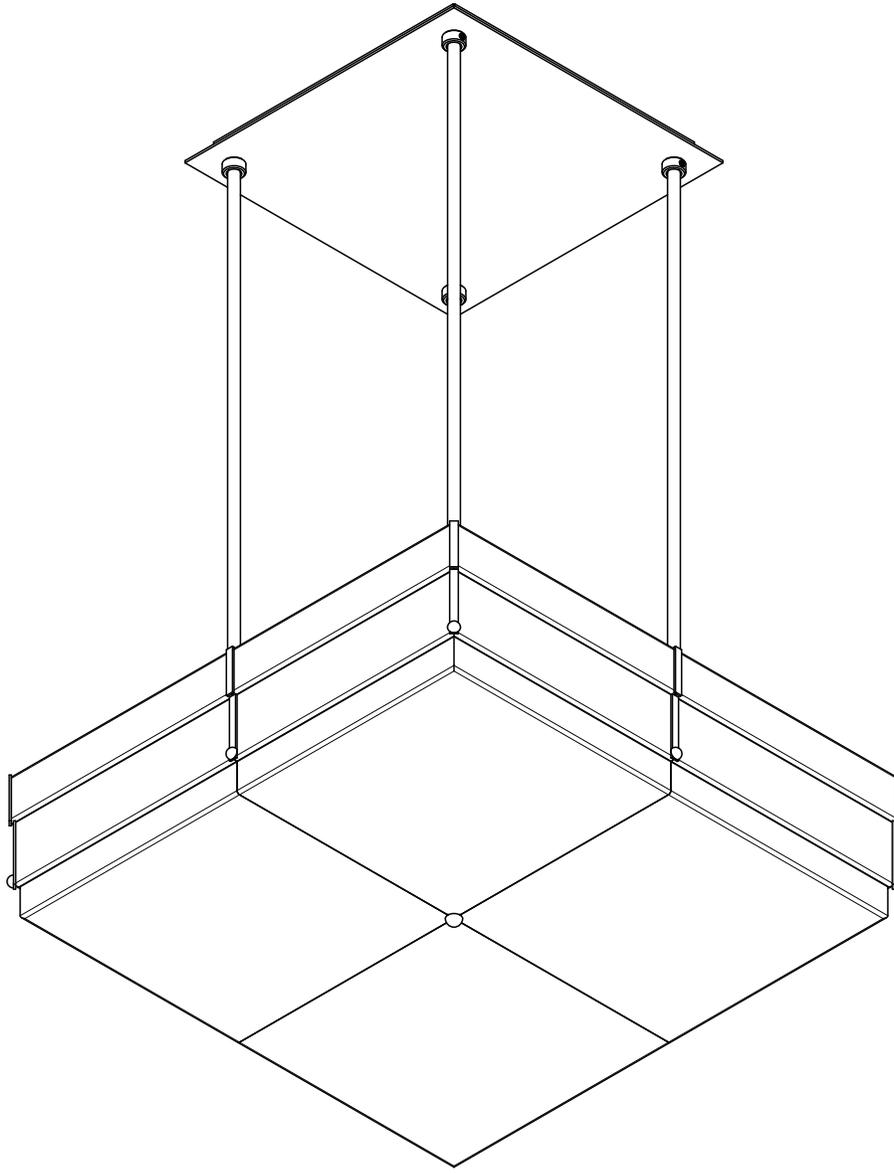

HENRII's design philosophy centers on preserving the natural qualities of each material.

All of our products are handmade and finished without protective lacquers, allowing the surface to age naturally. Oxidation is considered a normal and valued part of the patina that develops over time. While we take great care to ensure all items leave our studio in pristine condition, some pieces may exhibit slight oxidation marks upon arrival.

Every effort is made to accurately represent product colours, finishes, and dimensions.

However, HENRII reserves the right to make changes without prior notice to accommodate production requirements, technological developments, or market needs.

HENRII

ohn-rē

SERVICE@HENRII.COM 213-372-0418 WWW.HENRII.COM
1513 GARDENA AVE, GLENDALE, CA 91204